

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

(43) International Publication Date
13 February 2003 (13.02.2003)


(10) International Publication Number
WO 03/012255 A1

PCT

<p>(51) International Patent Classification⁷: E21B 43/10</p> <p>(21) International Application Number: PCT/GB02/02886</p> <p>(22) International Filing Date: 24 June 2002 (24.06.2002)</p> <p>(25) Filing Language: English</p> <p>(26) Publication Language: English</p> <p>(30) Priority Data: 09/918,002 30 July 2001 (30.07.2001) US</p> <p>(71) Applicant (for all designated States except US): WEATHERFORD/LAMB, INC. [US/US]; 515 Post Oak Blvd, Suite 600, Houston, TX 77027 (US).</p> <p>(71) Applicant (for IS only): HARDING, Richard, Patrick [GB/GB]; Marks & Clerk, 4220 Nash Court, Oxford Business Park South, Oxford, Oxfordshire OX4 2RU (GB).</p>	<p>(72) Inventor; and</p> <p>(75) Inventor/Applicant (for US only): MACKAY, Alexander, Craig [GB/GB]; 13 Skene Square, Aberdeen, Aberdeenshire AB25 2UU (GB).</p> <p>(74) Agents: MARKS & CLERK et al.; 4220 Nash Court, Oxford Business Park South, Oxford, Oxfordshire OX4 2RU (GB).</p> <p>(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GI, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.</p>
---	--

[Continued on next page]

(54) Title: COMPLETION APPARATUS AND METHODS FOR USE IN WELLBORES

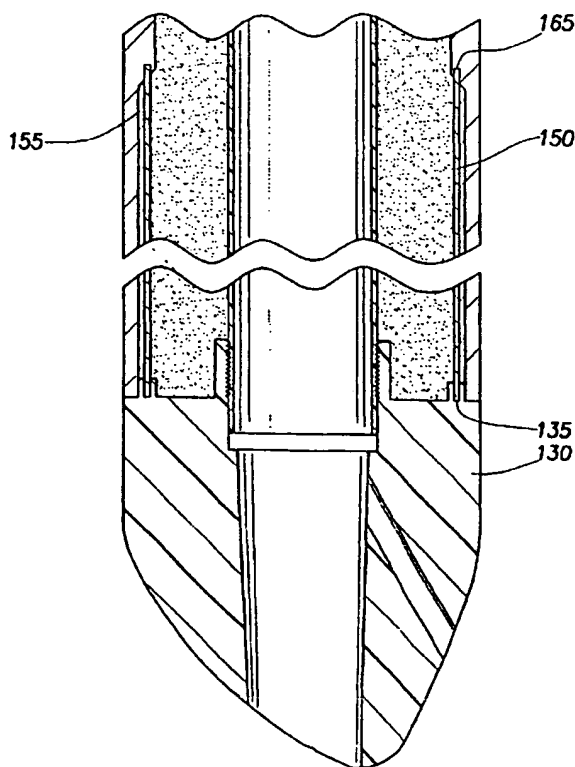

(57) Abstract: An apparatus and methods for preventing the accumulation of unwanted materials in an enlarged inner diameter portion (160) of a casing or housing (110). In one aspect of the invention, a sleeve (150) is disposed in the housing to isolate an annular area (155) defined by the outer surface sleeve and the wall of the enlarged inner diameter portion. The sleeve prevents unwanted materials from being disposed in the annular area. The sleeve can later be expanded into the enlarged inner diameter portion, removed from the wellbore or destroyed. In another aspect of the invention, the sleeve is provided and disposed to cover the enlarged inner diameter portion. By covering the enlarged inner diameter portion, unwanted material is prevented from accumulating at said portion and from interfering with the expansion of the next casing into said portion to form a monobore. The sleeve can be made from materials that are dissolvable, elastically deformable, or retrievable.

WO 03/012255 A1

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

COMPLETION APPARATUS AND METHODS FOR ITS USE IN WELLBORES

The present invention provides an apparatus and methods for use in wellbores. More particularly, the invention provides an apparatus and methods for use with a cement shoe assembly having an isolation sleeve for use in monobore wells. Even more particularly, the invention provides a cement shoe assembly with an enlarged inner diameter portion and a sleeve for isolating the enlarged portion from the bore of the cement shoe, thereby facilitating the expansion of a tubular into the enlarged portion after cementing. The invention also provides an isolation sleeve for use with a casing in a monobore well.

In the drilling of a hydrocarbon well, a wellbore is formed using a drill bit that is urged downwardly at a lower end of a drill string. After drilling a predetermined depth, the drill string and bit are removed and the wellbore is lined with a string of tubulars or casing. The casing is subsequently cemented, thereby protecting the formation and preventing the walls of the wellbore from collapsing. The casing also provides a reliable path through which drilling tools, drilling mud, and ultimately, production fluid may travel.

After the wellbore is lined with the initial string of casing, the well is drilled to a new depth. A new string of tubulars or liner is then lowered into the well. The new liner is positioned so that the top of the liner overlaps the bottom of the existing casing. Thereafter, with the liner held in place with a mechanical hanger, the liner is cemented. In cementing a tubular string, a column of cement is pumped into the tubular and forced to the bottom of the wellbore where it flows out and flows upward into an annulus defined by the wellbore and the new string of liner.

In order to facilitate cementing of a tubular string in a well, a cementing apparatus referred to as a cement shoe may be lowered into the wellbore at the bottom of the tubular string to be cemented. The shoe typically includes various components including a tapered nose portion located at the downhole end of the tubular to facilitate

insertion of the shoe into the borehole. Additionally, a check valve constructed and arranged to partially seal the end of the tubular is provided. The check valve prevents entry of well fluid during run-in while permitting cement to subsequently flow outwards. The same valve or another valve or plug typically located in a baffle collar
5 above the cementing apparatus prevents the cement from back flowing into the tubular. Components of the cementing shoe are made of fibreglass, plastic, or other drillable material. Once the cementing is completed, the shoe and any cement remaining in the casing can later be destroyed when the wellbore is drilled to a new depth.

10 Recently, an apparatus has been developed for expanding the diameter of a liner in a wellbore to conform to the larger diameter of a previously run casing string. Figure 1 is an exploded view of an exemplary expansion tool 700. The expansion tool 700 has a body 702 which is hollow and generally tubular with connectors 704 and 706 for connection to other components (not shown) of a downhole assembly. The connectors
15 704 and 706 are of a reduced diameter compared to the outside diameter of the longitudinally central body part of the tool 700. The central body part has three recesses 714 to hold a respective roller 716. Each of the recesses 714 has parallel sides and extends radially from a radially perforated tubular core (not shown) of the tool 700. Each of the mutually identical rollers 716 is somewhat cylindrical and barrelled. Each
20 of the rollers 716 is mounted by means of an axle 718 at each end of the respective roller and the axles are mounted in slidable pistons 720. The rollers are arranged for rotation about a respective rotational axis, which is parallel to the longitudinal axis of the tool 700, and radially offset therefrom at 120-degree mutual circumferential separations around the central body. The axles 718 are formed as integral end members
25 of the rollers 716 and the pistons 720 are radially slidable, one piston 720 being slidably sealed within each radially extended recess 714. The inner end of each piston 720 is exposed to the pressure of fluid within the hollow core of the tool 700 by way of the radial perforations in the tubular core. In this manner, pressurized fluid provided from the surface of the well, via a tubular, can actuate the pistons 720 and cause them to
30 extend outward and to contact the inner wall of a tubular to be expanded. Additionally, at an upper and a lower end of the expansion tool 700 are a plurality of non-compliant

rollers 703 constructed and arranged to initially contact and expand the tubular prior to contact between the tubular and fluid actuated rollers 716. Unlike the compliant, fluid actuated rollers 716, the non-compliant rollers 703 are supported only with bearings and they do not change their radial position with respect to the body portion of the tool 700.

5

Historically, each string of tubulars inserted to line a wellbore has necessarily been smaller in diameter than the string previously inserted. In this respect, the wellbore typically consists of sequential strings of tubulars of an ever-decreasing inner and outer diameter. The ability to expand a tubular *in situ* has led to the idea of monobore wells, wherein through the expansion of entire tubular strings in the wellbore, the wellbore remains at about the same inner diameter throughout its length. The advantages of the monobore well are obvious. The tubulars lining the borehole, and therefore, the possible path for fluid in and out of the well remains consistent regardless of well depth. Additionally, wellbore components and other devices can more easily be run into the well without regard for the restriction of decreasing diameters of the lining encountered on the way to the bottom of the wellbore. One problem with monobore wells relates to the difficulty of expanding one tubular into another when the outer tubular is cemented into the wellbore, preventing the outer diameter from increasing as the inner tubular is expanded into it.

20

In order to facilitate the assembly of tubular strings to form a monobore, the lower portion of the upper string of tubulars is specifically designed with an enlarged inner diameter in the area that will receive the expanded upper portion of a lower string. To join the tubulars with an expansion means, the upper end of the second string is aligned with the enlarged inner diameter portion of the first string. An expansion tool is used to radially expand the upper end of the second string into the enlarged inner diameter portion to approximately the same inner and outer diameter as the first string. In this manner, the second tubular string is expanded into the first string without an increase in the outer diameter of the first string and without the use of conventional slips.

30

In an example of the above-described design, a cement shoe is built into the lower portion of the first string of tubulars. The housing of the shoe has an enlarged inner diameter portion as discussed above. After the cement shoe is used to cement the tubular string in the wellbore, the interior portions of the shoe are drilled out as a new
5 borehole is formed therebelow. Subsequently, a second string of tubulars is run into the new section of borehole, and the upper portion of the second string of tubulars is expanded into the enlarged inner diameter portion of the first string as described herein.

Because of the enlarged inner diameter portion of the first string, subsequent drilling of
10 the cement shoe is usually inadequate to remove some residual material from the lower portion of the string. The material typically remains around the inside wall of the enlarged inner diameter portion because the outer diameter of the drill bit does not reach it. The residual material can interfere with the connection between the upper end of the next string of tubulars and the lower end of the existing string. Additionally, the
15 residual material may extend into the bore and interfere with wellbore components that are run-in into the wellbore.

A need, therefore, exists for an apparatus and method to more efficiently prevent the accumulation of residual material in a tubular prior to connection to another tubular by
20 expansion. There is a further need for a cement shoe that can be used in a tubular string without leaving residual material in an enlarged inner diameter portion of the string. There is a yet a further need for a cement shoe with an enlarged inner diameter portion and a method and apparatus for temporarily isolating the enlarged inner diameter
portion from residual material.

25

In accordance with one aspect of the present invention there is provided an apparatus for isolating an annular area of tubulars comprising:

a tubular housing having a first inner diameter portion and an enlarged inner diameter portion; and

a sleeve disposed in the housing adjacent the enlarged inner diameter portion, the sleeve having an inner diameter substantially the same as the first inner diameter portion.

5 Further aspects and preferred features are set out in claims 2 *et seq.*

The present invention generally provides an apparatus and methods to prevent unwanted materials such as cement from accumulating in a lower portion of a tubular having an enlarged inner diameter portion. A cement shoe assembly is provided at a lower end of
10 a tubular string with a sleeve co-axially disposed therein to cover the enlarged inner diameter portion of the tubing. The sleeve serves to temporarily make the diameter of the tubular uniform and to isolate an annular area between the outside of the sleeve and the inner wall of the casing. A method of preventing accumulation of unwanted materials by disposing a sleeve in the enlarged inner diameter portion and later
15 expanding the sleeve into said portion is provided. In one embodiment the sleeve is dissolvable. In another embodiment, a deformable sleeve with at least one internal ring is provided to cover the enlarged inner diameter portion. In still another embodiment, the sleeve is retrievable from the surface of the well.

20 Some preferred embodiments of the invention will now be described by way of example only and with reference to the accompanying drawings, in which:

Figure 1 is an exploded view of an exemplary expansion tool;

25 Figure 2 is a cross-sectional view of a cement shoe assembly disposed at a lower end of a tubular and having a housing that includes an enlarged inner diameter portion at a lower end;

Figure 3 is an enlarged view of the enlarged inner diameter portion of the cement shoe
30 assembly;

Figure 4 is a section view showing the tubular and cement shoe housing cemented in a wellbore and a second tubular partially expanded into the enlarged inner diameter portion;

- 5 Figure 5 is a section view showing an upper portion of a second tubular completely expanded into the enlarged inner diameter portion;

Figure 6 is a top section view showing a temporarily expanded piece of patch casing co-axially disposed in the cement shoe housing;

10

Figure 7 illustrates the patch casing in a collapsed position; and

Figure 8 is a section view of the patch casing disposed in the enlarged inner diameter portion.

15

- Figure 2 is a cross-sectional view of a cement shoe assembly 100 disposed at a lower end of a tubular 101 and having a housing 110 that includes an enlarged inner diameter portion 160 at a lower end. The assembly 100 is typically disposed at a lower end of a string of tubulars that is run into a well and cemented. The cement isolates the wellbore from the formation therearound and prevents the wellbore from collapsing. The assembly 100 is preferably connected to a tubular 101 by a threaded connection 102 formed therebetween. The cement shoe assembly 100 includes a drillable shoe portion 120 disposed within the housing 110. The drillable shoe portion 120 includes a longitudinal bore 123 extending through the centre of the cement shoe assembly 100 and provides a fluid path for the cement. The bore 123 communicates with the tubular 101 through a biased, one way valve 150 disposed at the upper end of the bore 123. The valve 150 permits fluid to enter the assembly 100 but prevents well fluids from passing from the wellbore and up into the tubular 101.

- 20
25
30 Adjacent valve 150, an annular area 121 defined between the bore 123 and the housing 110 is filled with concrete to stabilize the bore 123. Lining the bore 123 between the

valve 150 and a conical nose portion 130 is a tubular 131. The conical nose portion 130 serves to facilitate the insertion of the assembly 100 into the wellbore. Adjacent the tubular 131, an annular area 132 between the cement shoe tubular and the housing 110 is filled with sand 122 or some other aggregate.

5

The housing 110 of the cement shoe assembly 100 includes an enlarged inner diameter portion 160 at a lower end. The enlarged inner diameter portion 160 has an inner diameter which is greater than the inner diameter of the upper section of the housing 110 and of the tubular 101 thereabove. The enlarged inner diameter portion 160 is configured to receive the top portion of a lower string of tubulars 200 (Figure 4).

10

A sleeve 150 is co-axially disposed in the housing 110 and covers the enlarged inner diameter portion 160 to isolate the annular area formed between the inner surface of the enlarged inner diameter portion 16 and the outer surface of the sleeve 150. With the sleeve 150 in place, the inner diameter of the housing 110 is constant and is substantially the same diameter as the tubular 101 thereabove. The constant inner diameter ensures that the cement shoe material is removed as a drill bit passes through the housing 110. The sleeve 150 may be assembled with the cement shoe assembly 100 prior to run-in or the sleeve 150 may be installed downhole with a run-in tool.

15
20

Figure 3 is an enlarged view of the enlarged inner diameter portion 160 of the cement shoe assembly 100. The sleeve 150 is coupled to the housing 110. The enlarged inner diameter portion 160 of the housing 110 has a recess 165 on its upper most end. The recess 165 is constructed to receive an upper end of the sleeve 150. At the top surface of the conical nose portion 130, a second recess 135 is provided to receive a lower end of the sleeve 150. The sleeve 150 may be frictionally attached or attached by a coupling means to the housing 110. The coupling means may be a rivet, screw, glue or other connector that can hold the sleeve 150 in place. The sleeve 150 is also shown forming the annular area 155 with the housing 110.

25

30

In an alternative embodiment, the sleeve 150 may be used to temporarily seal the annulus 155. The sleeve at its lower end has a flange (not shown) that is bent towards enlarged inner diameter portion 160, thereby forming a seal. The seal may have an aperture therein to allow the annular area 155 to equalize pressure as the cement shoe assembly 100 is run into the wellbore. Additionally, the annular area 155 may be filled with a fluid to prevent unwanted materials from accumulating in the annular area 155. The fluid may be a polymer, gel, foam, oil, or other fluid that is displaceable from the annular area 155 when the sleeve 150 is expanded into the enlarged inner diameter portion 160. The annular area 155 is filled with the fluid at the surface during assembly of the sleeve 150 with the housing 110.

In the cementing operation, the cement shoe assembly 100 is inserted into the wellbore on a string of tubulars. Thereafter, cement is injected and exits the bottom of the assembly 100. The cement is then forced up an annular area formed between the outer surface of the assembly 100 and the formation therearound by a column of fluid. The cement is then allowed to cure. With the addition of the sleeve 150, the enlarged inner diameter portion 160 has essentially the same inner diameter as the housing 110 and the tubular string. Subsequently, a drilling tool is run into the wellbore inside of the tubular 101 and the drillable shoe portion 120 and conical nose portion 130 are drilled up and destroyed, leaving only the housing 110 and the sleeve 150. The sleeve 150 is not destroyed because the outer diameter of the drill bit is slightly smaller than the inner diameter of the sleeve 150. Because the sleeve 150 is in place, the drill bit is able to drill out the cement or other unwanted materials in all sections of the housing 110.

After the shoe portion 120 is drilled out, the housing 110 originally used to house the components of the cement shoe assembly 100, becomes a part of the upper string of a tubulars 210. A new string of tubulars 200 (Figure 4) having a smaller diameter is inserted into the wellbore as in prior art methods. The new string 200 has a smaller outer diameter than the inner diameter of the upper string 210 and the cement housing 110 in order to be insert therethrough the upper string 210. Because the upper portion of the housing 110 is non-expandable, the cement shoe assembly 100 with sleeve 150 of

the present invention would typically only be used at the end of the first string of tubulars inserted into a well. Thereafter, some other means of facilitating a cement job would be employed. In one example, a cement shoe could be "pumped down" a tubular and any potential expansion problems are avoided.

5

Figure 4 is a section view showing the tubular 210 and cement shoe housing 110 cemented in a wellbore and a second tubular 200 partially expanded into the enlarged inner diameter portion. The top of the new string of tubulars 200 is shown aligned with the enlarged inner diameter portion 160 and the sleeve 150. The expansion tool 300 is used to expand the new string of tubulars 200 into the enlarged inner diameter portion 160 of the housing 110 so as to form a monobore and fix the tubulars in a sealing relationship. The expansion tool 300 operates with pressurized fluid supplied through run-in string 306. The expansion tool 300 is shown in an actuated position and is expanding the diameter of the new string of tubulars 200 into the enlarged inner diameter portion 160 of housing 110 along with the sleeve 150. Typically, the expansion tool 300 rotates as the rollers 304 are actuated and the tool 300 is urged upwards in the wellbore. The expansion tool 300 can also be urged downward to expand the new string of tubulars 200. In this manner, the expansion tool 300 can be used to enlarge the diameter of new string of tubulars 200 circumferentially to a uniform size.

20

When the new string of tubulars 200 is expanded, the sleeve 150 is also expanded into the enlarged inner diameter portion 160. The new string of tubulars 200 and the sleeve 150, when expanded together into the enlarged inner diameter portion 160, will have the same inner diameter as tubular 101 thereabove, thereby forming a monobore. Thus, the sleeve 150 becomes seamlessly "sandwiched" between the new tubular 200 and the enlarged inner diameter portion 160 of the housing 110. While the upper portion of the housing 110 is not expandable, subsequent tubular strings will be of an outer diameter making it possible for the strings to be inserted through the housing and subsequently expanded to a greater diameter.

30

Figure 5 is a section view showing an upper portion of a second tubular 200 completely expanded into the enlarged inner diameter portion 160. The Figure shows the relative position of the new tubular 200 and the sleeve 150 after being expanded by the expansion tool 300 into the enlarged inner diameter portion 160. By expanding the new tubular 200 and the sleeve 150 into the enlarged inner diameter portion 160 of housing 110, the inner diameter of new tubular 200 is aligned with the enlarged inner diameter portion of the housing 110.

In an alternative embodiment, the sleeve 150 may be manufactured from a dissolvable material such as aluminium, zinc, magnesium, or composite material such as carbon fibre. The dissolvable material must be able to withstand the acidic conditions and temperatures found in wellbores and be strong enough to withstand physical abuse by downhole tools and fluids during the cementing process. The dissolvable material is dissolvable by a dissolving fluid such as benzene, acetone, acids such as hydrochloric acid, sulphuric acid, phosphoric acid, hydrofluoric acid, or similar fluid. The dissolving fluid however, must not be strong enough to dissolve the cement, and damage the tubulars or wellbore components.

In another alternative embodiment, a retrievable or drillable piece of patch casing may be used as the sleeve 150. Figure 6 is a top section view showing a temporarily expanded piece of patch casing 500 co-axially disposed in the cement shoe housing 110. The patch casing 500 is a piece of tubing made from elastically deformable materials (Figure 7 shows normal state). The patch casing 500 is sized for the length of the enlarged inner diameter portion 160. The patch casing 500 is made to "deform" into an annular piece of casing by at least one retaining member such as an expandable internal ring 600 (Figure 8). The expandable internal ring 600 is constructed and designed to temporarily expand the patch casing 500 to cover the enlarged inner diameter portion 160 of the housing 110. As shown in Figure 6, no annular area is formed between the patch casing 500 and the enlarged inner diameter portion 160.

In operation, the patch casing 150 is inserted and aligned with the enlarged inner diameter portion 160 during assembly of the cement shoe assembly 100. The internal rings 600 are actuated and expanded, which forces the patch casing 500 to expand and cover the enlarged inner diameter portion 160. The installed patch casing 500 serves
5 the same purpose as the sleeve 150 in previous embodiments and prevents the accumulation of unwanted materials in the enlarged inner diameter portion 160.

After cementing in a wellbore, the internal rings 600 are caused to collapse, thereby allowing the patch casing 500 to resume its original collapsed shape. Figure 7 illustrates
10 the patch casing 500 in a collapsed position. The rings 600 along with the patch casing 600 can be retrieved to the surface using retrieval tools that are well known in the art. Alternatively, the rings 600 can be drilled out causing the patch casing 500 to collapse and to be drilled through by the drill bit.

15 Figure 8 is a section view of the patch casing 500 disposed at the enlarged inner diameter portion 160. The patch casing 500 is shown in the "deformed" or expanded state. The patch casing 500 is shown having at least two internal rings 600 at each end of the patch casing 500. In the deformed state, the patch casing 500 is able to cover the enlarged inner diameter portion 160 and prevents the accumulation of unwanted
20 materials in annulus 155.

In addition to being used as described above, the sleeve can be used with any casing or tubular that has an enlarged inner diameter portion at an end that requires temporary protection of unwanted materials. Additionally, although the present invention has been
25 described for use in hydrocarbon wells, it is also applicable to geothermal wells, injection wells, or any other type of well.

While the foregoing is directed to embodiments of the present invention, other and further embodiments of the invention may be devised without departing from the basic
30 scope thereof, and the scope thereof is determined by the claims that follow.

CLAIMS:

1. An apparatus for isolating an annular area of tubulars comprising:
a tubular housing having a first inner diameter portion and an enlarged inner
5 diameter portion; and
a sleeve disposed in the housing adjacent the enlarged inner diameter portion,
the sleeve having an inner diameter substantially the same as the first inner diameter
portion.
- 10 2. An apparatus as claimed in claim 1, wherein an annular space is formed between
the sleeve and the enlarged inner diameter portion.
3. An apparatus as claimed in claim 2, wherein the annular space is sealed.
- 15 4. An apparatus as claimed in claim 2 or 3, wherein the annular space is filled with
a void filling substance.
5. An apparatus as claimed in claim 4, wherein the substance is selected from a
group consisting of gel, polymer, foam, oil, and other materials that are displaceable
20 after use.
6. An apparatus as claimed in any preceding claim, wherein the sleeve is made
from a dissolvable material.
- 25 7. An apparatus as claimed in claim 6, wherein the dissolvable material is selected
from the group consisting of aluminium, zinc, magnesium, and composite material such
as carbon fibre.
8. An apparatus as claimed in claim 6 or 7, wherein the dissolvable material is
30 dissolvable by a dissolving fluid selected from a group consisting of benzene, acetone,

acids, such as hydrochloric acid, sulphuric acid, phosphoric acid, hydrofluoric acid and similar fluids.

9. An apparatus as claimed in any of claims 1 to 5, wherein the sleeve is radially
5 expandable.
10. An apparatus as claimed in claim 9, wherein the radially expandable sleeve is a patch casing comprising of an elastically deformable material.
- 10 11. An apparatus as claimed in claim 10, wherein the sleeve is retained in an initial cylindrical shape by at least one retaining member.
12. An apparatus as claimed in claim 11, wherein the retaining member is an internal ring.
15
13. An apparatus as claimed in claim 12, wherein the sleeve and the ring are retrievable to the surface of the well.
14. A cement shoe assembly comprising:
20 an apparatus as claimed in any preceding claim, the housing being for disposal at an end of a tubular string; and
a drillable cement shoe portion disposed in the housing, the cement shoe portion in selective fluid communication with the tubular string.
- 25 15. A method of preventing accumulation of unwanted materials in an annular area in a wellbore comprising:
providing a first string of casing having an enlarged inner diameter portion at an end into a wellbore;
coupling a sleeve to the enlarged inner diameter portion to form the annular
30 area;
disposing a second string of casing into the first string of casing; and

expanding the second string of casing along with the sleeve into the enlarged inner diameter portion.

16. A method of isolating an annular area in a wellbore comprising:
5 providing a first string of casing having an enlarged inner diameter portion at an end into a wellbore;
coupling a sleeve to the enlarged inner diameter portion; and
isolating an annular area formed between the outer surface of the sleeve and the enlarged inner diameter portion.
- 10 17. The method of claim 15 or 16, further comprising sealing the annular area.
18. A method as claimed in claim 15, 16 or 17, further comprising filling the annular area with a void filling substance that is displaceable after use.
- 15 19. A method as claimed in claim 18, wherein the void filling substance is selected from a group consisting of gel, polymer, foam, oil, and other materials that are displaceable after use.
- 20 20. A method as claimed in any of claims 15 to 19, wherein the sleeve is made from a dissolvable material.
21. A method as claimed in claim 20, wherein the dissolvable material is selected from the group consisting of aluminium, zinc, magnesium, and composite material such
25 as carbon fibre.
22. A method as claimed in claim 20 or 21, wherein the dissolvable material is dissolvable by a dissolving fluid selected from a group consisting of benzene, acetone, acids, such as hydrochloric acid, sulphuric acid, phosphoric acid, hydrofluoric acid and
30 similar fluids.

23. A method as claimed in claim 15 or 16, wherein the sleeve is made from an elastically deformable material that is temporarily retainable in an initial cylindrical shape.
- 5 24. A method as claimed in claim 23, wherein the sleeve is retained in the initial cylindrical shape by at least one retaining member.
25. A method as claimed in claim 24, wherein the retaining member is an internal ring.
- 10 26. A method as claimed in claim 25, wherein the sleeve and the ring are retrievable to the surface of the well.
- 15 27. A method of preventing accumulation of unwanted materials comprising:
providing a first string of casing having an enlarged inner diameter portion at an end into a wellbore;
coupling a dissolvable sleeve to the enlarged inner diameter portion; and
dissolving the sleeve with a dissolving solution.
- 20 28. A method of preventing accumulation of unwanted materials comprising:
providing a first string of casing having an enlarged inner diameter portion at an end and a deformable sleeve into a wellbore;
coupling a sleeve to the enlarged inner diameter portion;
expanding the deformable sleeve; and
25 retrieving the sleeve.
29. A method of preventing accumulation of unwanted materials comprising:
providing a cement shoe assembly having a housing with an enlarged inner diameter portion at an end;
30 attaching a sleeve to cover the enlarged inner diameter portion; and
expanding the sleeve into the enlarged inner diameter portion.

1/5

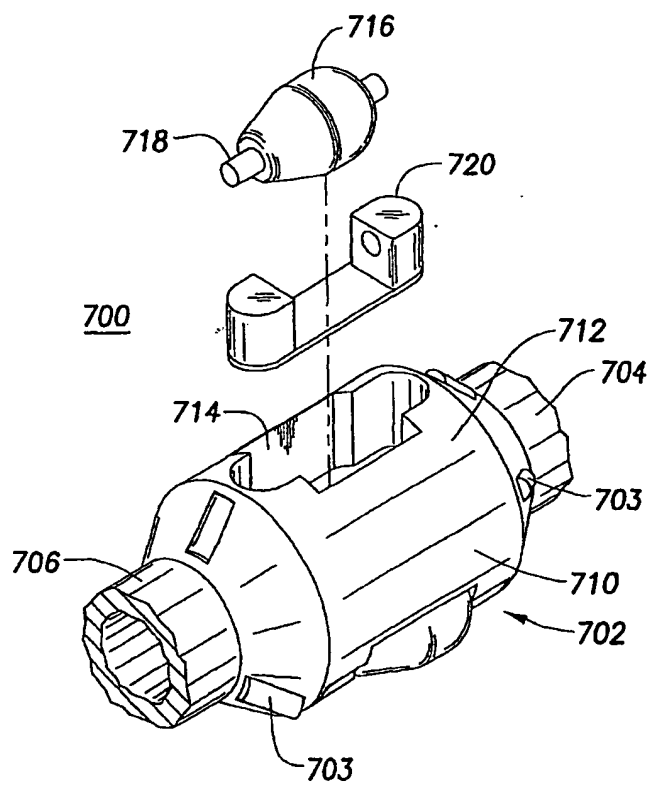


FIG.1

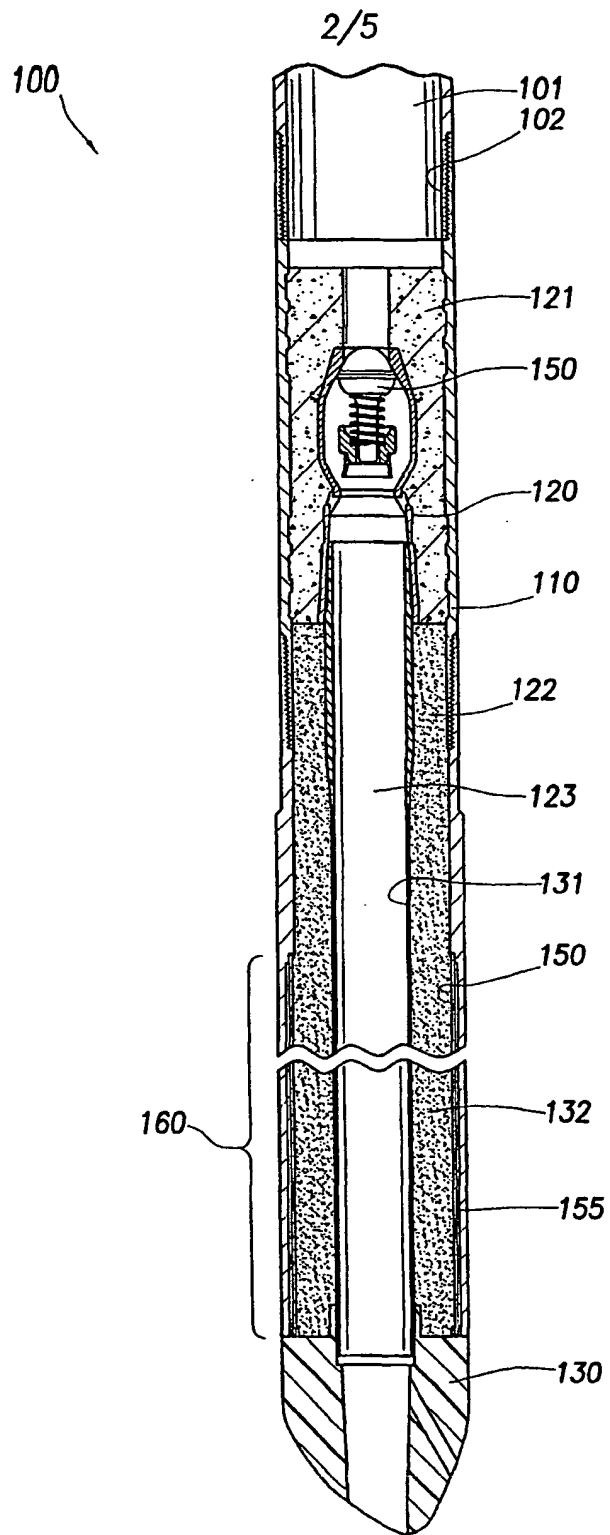


FIG.2

3/5

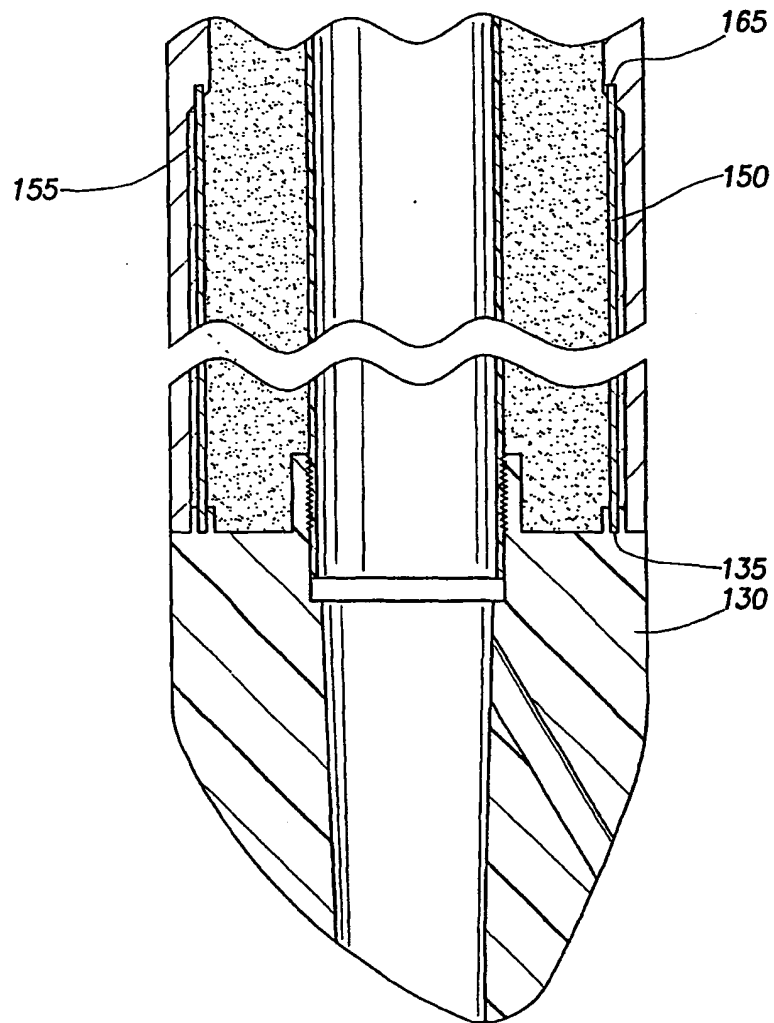


FIG.3

4/5

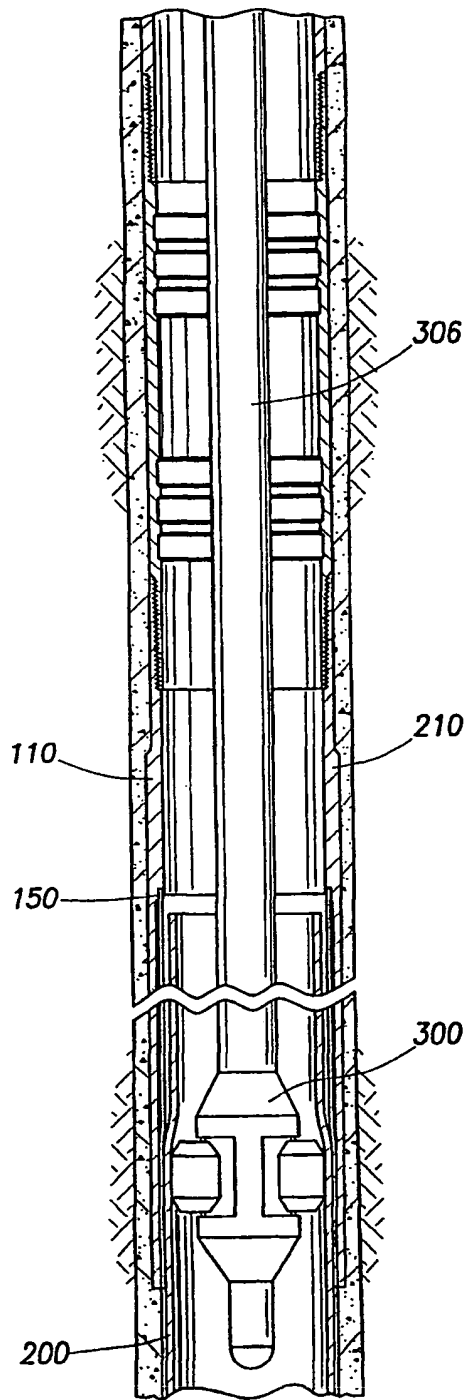


FIG. 4

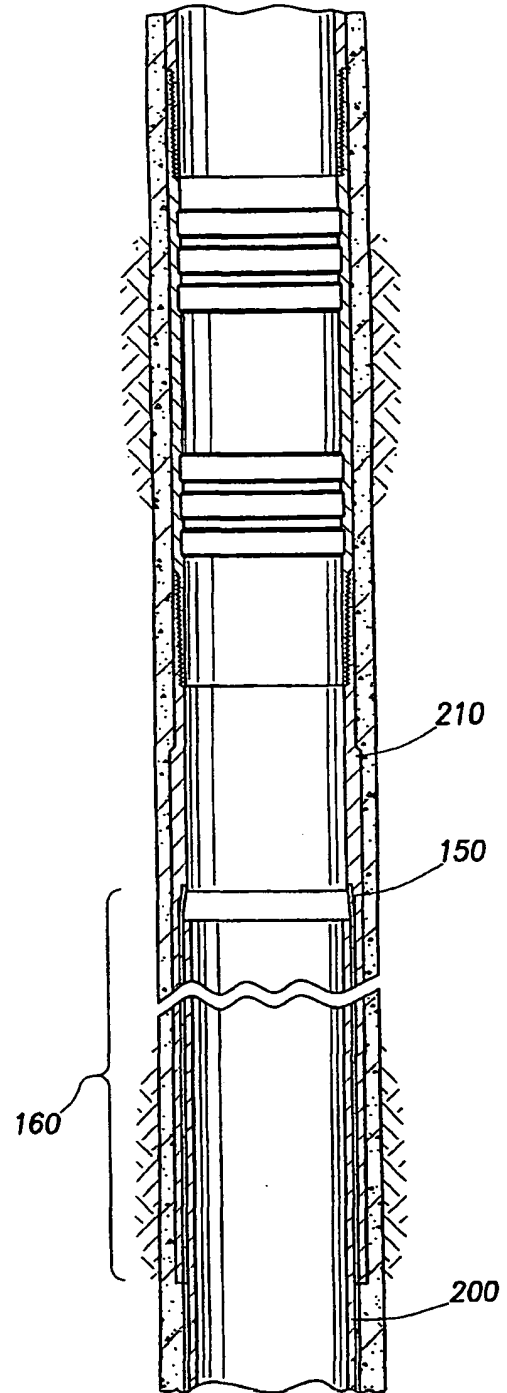


FIG. 5

5/5

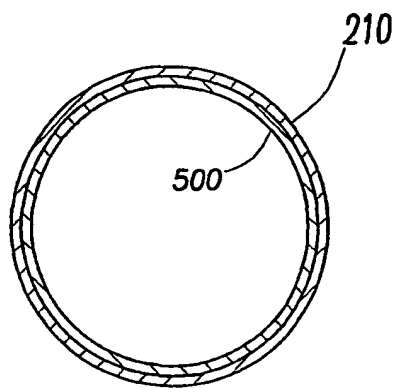


FIG. 6

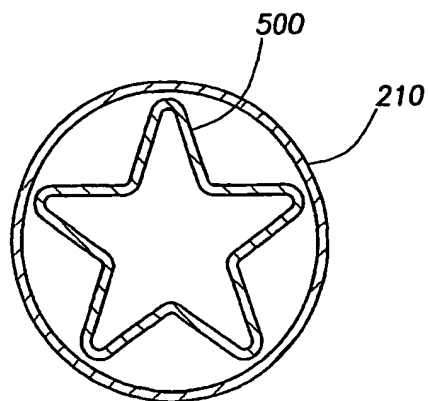


FIG. 7

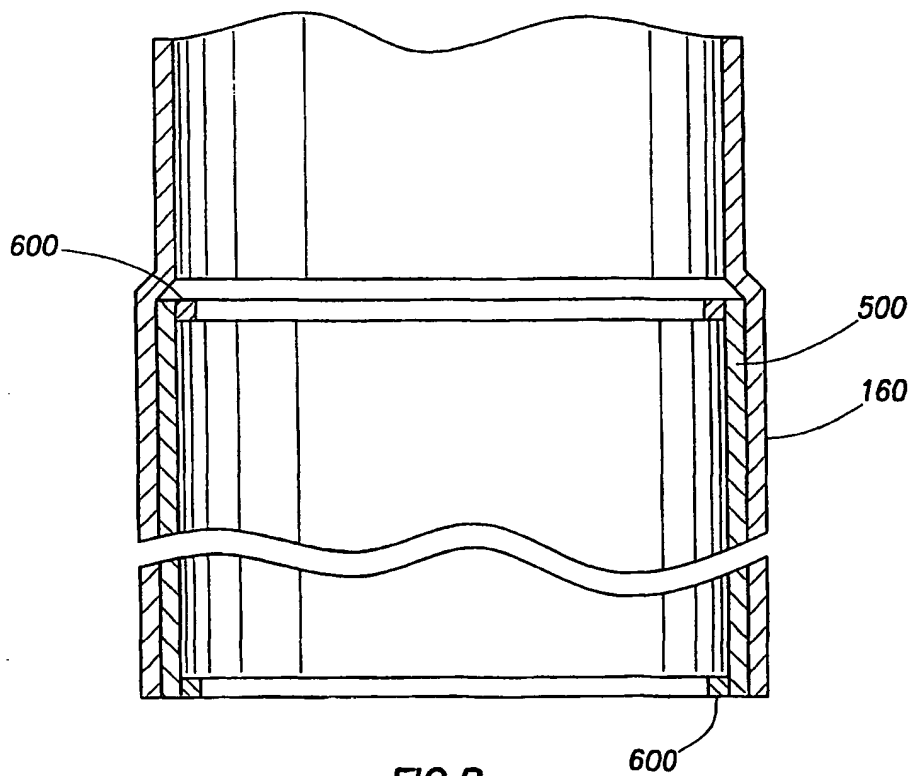


FIG. 8

INTERNATIONAL SEARCH REPORT

onal Application No

PCT/GB 02/02886

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 E21B43/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 04535 A (STEWART R BRUCE ;COOK ROBERT LANCE (US); ENVENTURE GLOBAL TECHNOLO) 18 January 2001 (2001-01-18) the whole document see in particular: -fig. 53c -shoes 908,1315,1720,3520,3940 -cpmposition of shoes 3355, 3520	1-22

☐ Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

24 September 2002

Date of mailing of the international search report

04/10/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax. (+31-70) 340-3016

Authorized officer

Tompouloglou, C

INTERNATIONAL SEARCH REPORT
Information on patent family members

International Application No
PCT/GB 02/02886

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0104535	A	18-01-2001	AU 5921400 A	30-01-2001
			GB 2368865 A	15-05-2002
			NO 20020070 A	08-03-2002
			WO 0104535 A1	18-01-2001
			US 2002060068 A1	23-05-2002